

LUNAR



Ideal for achieving design performance for corridor areas (100 lux)

Available with 3 lumen outputs

High quality body and diffuser



Lighting for
a Living

LUNAR



- Ideal for achieving design performance for corridor areas (100 lux)
- Full range of gear options including dimmable, DALI and emergency are available
- CRI: Ra>80
- Up to 122 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)



5 YR

IP44



TP(a)




High performance bulkhead

Order Code	Description	lm	W	lm/W	kg
LUN110NW	10W - 4000K	1200	10	120	2.20
LUN220NW	18W - 4000K	2200	18	122	2.20
LUN300NW	28W - 4000K	3200	28	114	2.20

Dimensions

Order Code	Dia. (mm)	C (mm)
LUN110NW	454	105
LUN220NW	454	105
LUN300NW	454	105

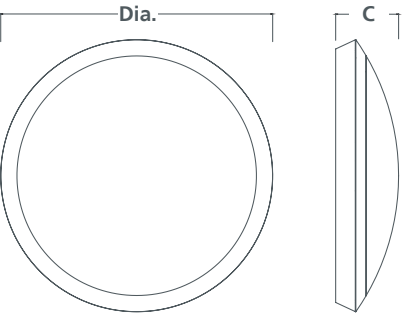

CONSTRUCTION

- Polycarbonate body and diffuser finished in white
- 20mm knock-out conduit entries on rear and side of body
- Supplied as standard with neutral white (4000K) LED

OPTIONS


M3	3 hours integrated emergency
A3	Auto self test
D3	DALI self test
HFS	Microwave movement sensor
HFSD	Dimmable microwave movement sensor
D	DALI dimming control gear
WW	Warm white (3000K)

INSTALLATION NOTES

Wall or ceiling fix via rear or side (x2) knock-outs and wired via rear cable entry

TO SPECIFY

Circular IP44 white / opal bulkhead as per TamLite LUNAR range

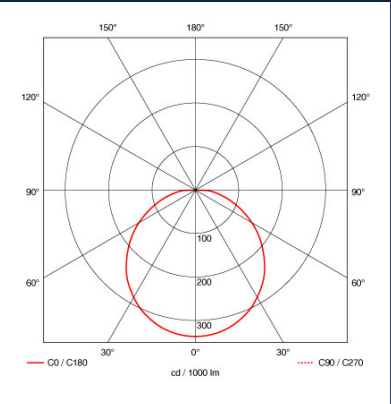

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for **a Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics