



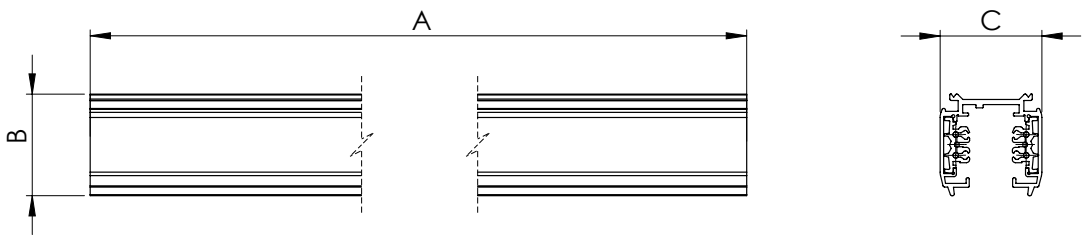
Product Name: TRIO TRACK EXTRUSION

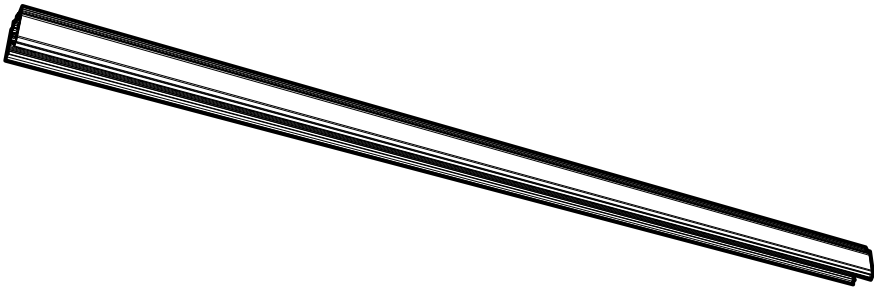
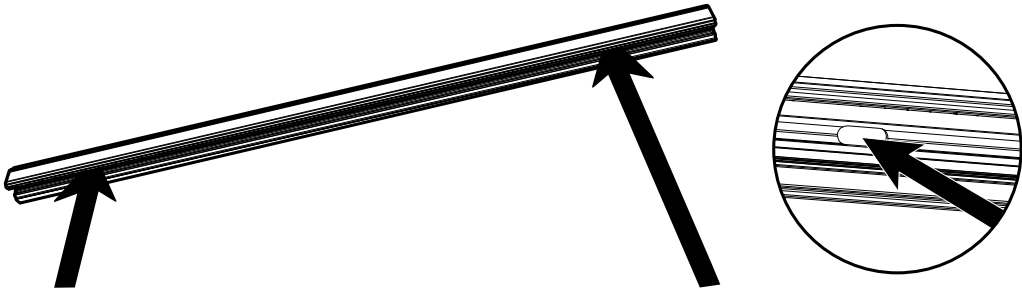
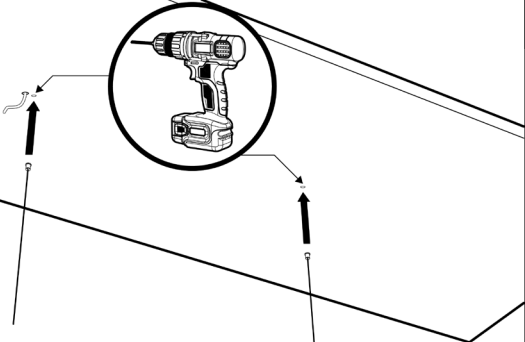
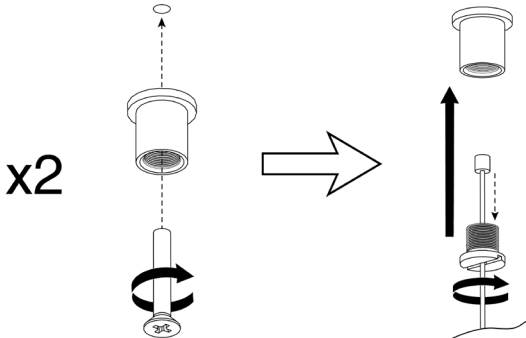
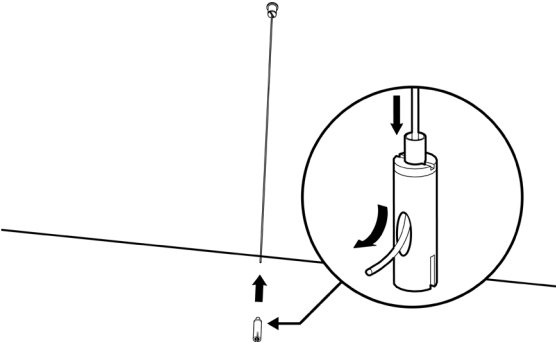
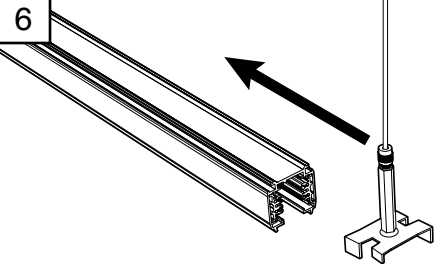
General information

- This product must be installed in accordance with the latest edition of the IET Wiring Regulations and local Building Regulation by a qualified competent person.
- The mains power supply must be turned off before inspection, installation, or removal of the product, ensuring that the supply is locked off to prevent inadvertently switching the supply on.
- It is the installer’s responsibility to ensure that the environmental operating and storage conditions are complied with and that any fire risks are considered.
- To ensure that the product warranty remains valid, the track system must be installed and maintained in accordance with these installation instructions and the product must not be modified in any way.

Dimensions

	A (mm)	B (mm)	C (mm)
T3D1	1000	35	35
T3D2	2000	35	35



1			
<p>Remove the product from its packaging.</p>			
2			
<p>Mount the track to the surface using appropriate hardware.</p>			
3			
<p>For suspension T3DSK - Prepare appropriate holes in the mounting surface.</p>			
4			
<p>Connect the second extrusion and tighten the screw to secure.</p>			
5			
<p>Press on head and feed cable through to desired length and cut.</p>			
6			
<p>Slide the suspension onto the track.</p>			