

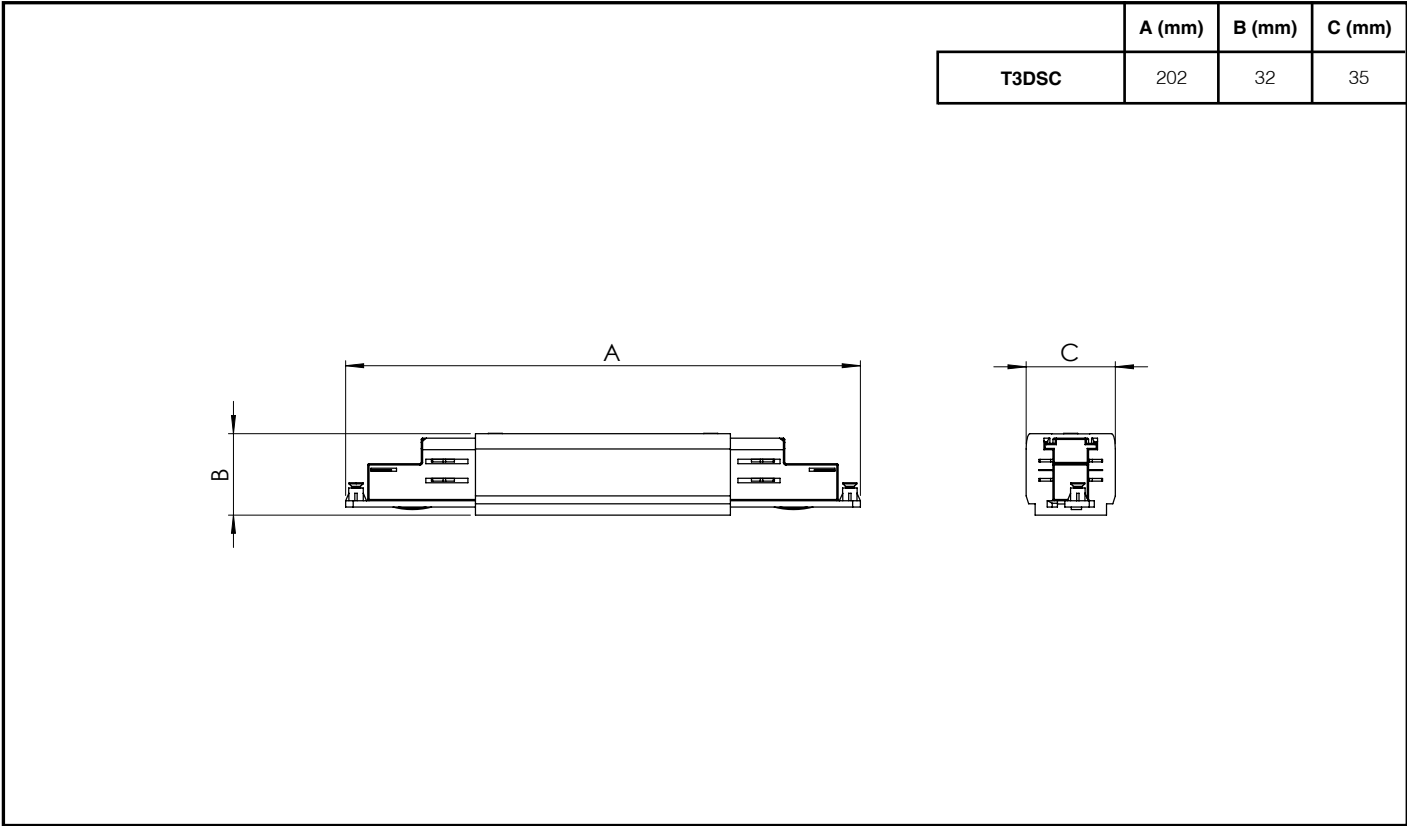


Product Name: TRIO TRACK STRAIGHT CONNECTOR

General information

- This product must be installed in accordance with the latest edition of the IET Wiring Regulations and local Building Regulation by a qualified competent person.
- The mains power supply must be turned off before inspection, installation, or removal of the product, ensuring that the supply is locked off to prevent inadvertently switching the supply on.
- It is the installer’s responsibility to ensure that the environmental operating and storage conditions are complied with and that any fire risks are considered.
- To ensure that the product warranty remains valid, the track system must be installed and maintained in accordance with these installation instructions and the product must not be modified in any way.
- For use with Tamlite TRIO Track only.

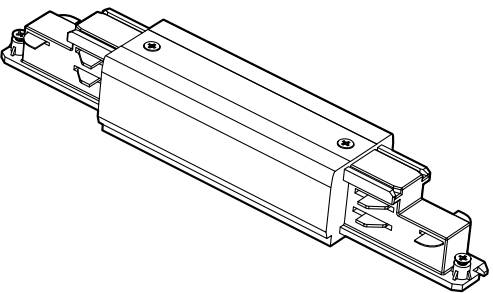
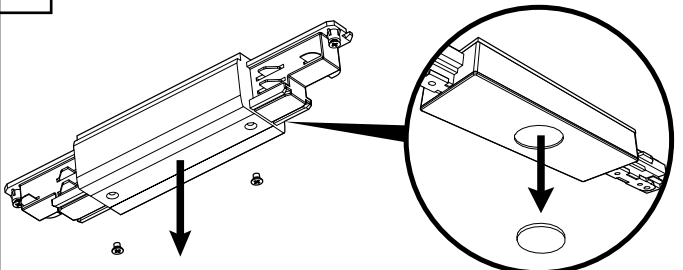

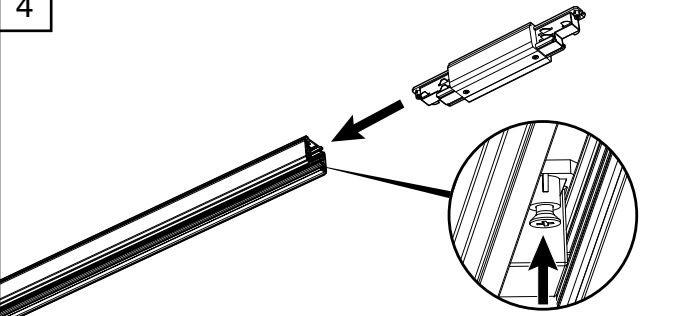
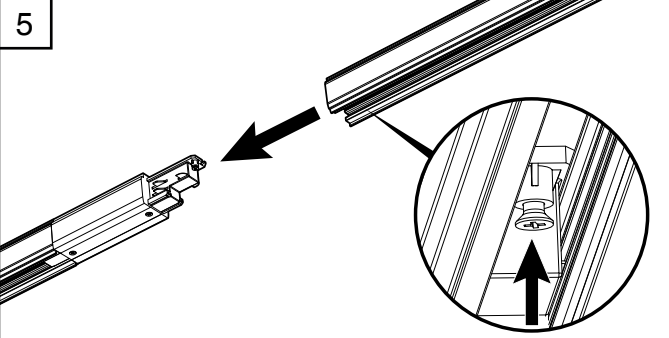
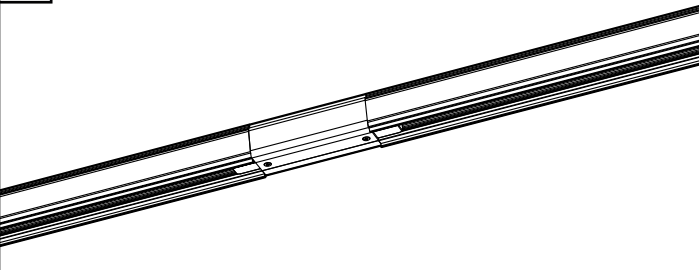
Dimensions



# INSTALLATION & OPERATING INSTRUCTIONS



Product Name: TRIO TRACK STRAIGHT CONNECTOR

|                                                                                                                                                                  |                                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1</p>  <p>Remove the product from its packaging.</p>                         | <p>2</p>  <p>If terminating power supply - Remove cover and knock out to feed wire through</p>        |
| <p>3</p>  <p>Terminations as shown for standard.</p>                           | <p>4</p>  <p>Push connector into installed Trio Track Extrusion and tighten the screw to secure.</p> |
| <p>5</p>  <p>Connect the second extrusion and tighten the screw to secure.</p> | <p>6</p>                                                                                            |

## Page 2 of 2

Tamlite Technical  
Stafford Park 12,  
Telford, Shropshire,  
TF3 3BJ

+44(0)1952 292441  
technical@tamlite.co.uk  
Document No: V1

