




# TYPHOON

Recessed sealed module for high degree of protection required

Rated IP54 from underside of ceiling

IK10 impact resistance



LIAQA AWARD  
WINNER 2017



ACCREDITED  
SUPPLIER

Lighting for  
**a Living**

# TYPHOON

## RECESSED SEALED LED MODULE

1 YR

IP54



IK10

### FEATURES

- > Recessed sealed module for areas where a high degree of protection is required
- > Rated IP54 from underside of ceiling
- > IK10 impact resistance
- > Ideal for commercial kitchens, changing rooms and other areas where splash protection is required
- > Full range of gear options including dimmable, DALI and emergency available
- > CRI: Ra>80
- > Up to 100 lumens per Watt efficacy
- > 50,000 hours lifetime (L70/B50)

### CONSTRUCTION

- > Steel body finished in white (RAL 9016)
- > Polycarbonate TP(a) high efficiency Opal diffuser

### TO SPECIFY ORDER


Recessed sealed IP54 module as per TamLite TYPHOON range

### INSTALLATION NOTES

Recessed lay-in for exposed 25mm ceiling grid. Brackets available for plasterboard mount. Frame available for metal pan ceilings

### OPTIONS

HFS	Microwave movement sensor
HFD	Digital dimmable version
HFSD	Dimmable microwave movement sensor
DALI	DALI dimming control gear
M3	3 hours integrated emergency
AST	Emergency self test
NL	Night-light

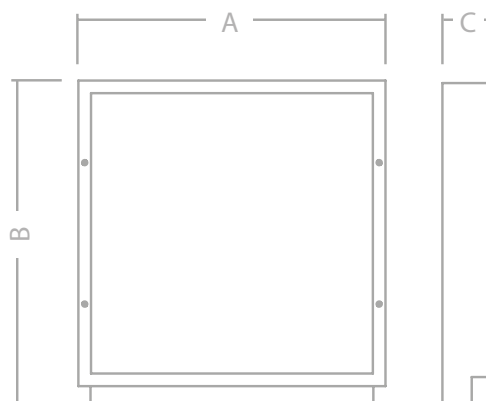


## RECESSED SEALED LED MODULE

Order Code	LED	lm	W	lm/W	A (mm)	B (mm)	C (mm)	kg
TSM66300NW	30W - 4000K	3000	30	100	595	595	70	5.50
TSM66400NW	40W - 4000K	4000	40	100	595	595	70	5.50
TSM66500NW	53W - 4000K	5000	53	95	595	595	70	5.50
TSM126600NW	60W - 4000K	6000	60	100	1200	595	70	10.00
TSM126800NW	80W - 4000K	8000	80	100	1200	595	70	10.00
TSM1261000NW	106W - 4000K	10000	106	95	1200	595	70	10.00



OFFICE - IDEAL FOR KITCHENS AND CHANGING ROOMS



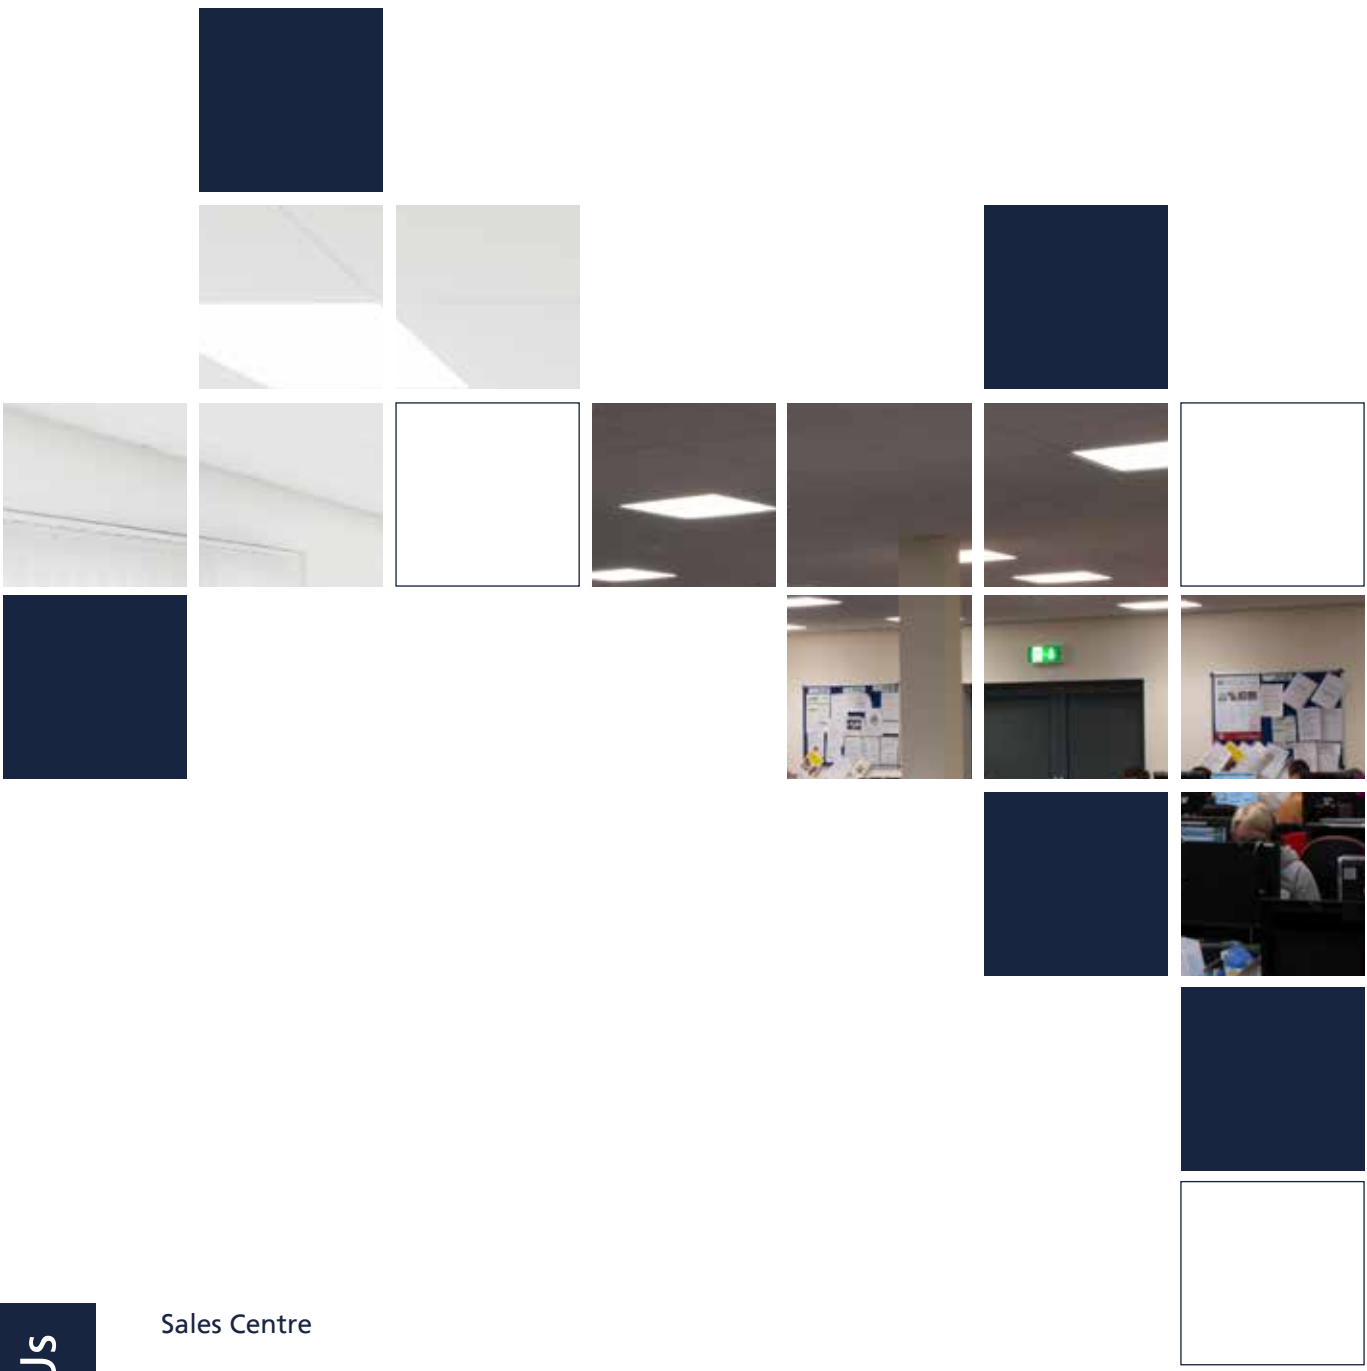

# Contact Us

## Sales Centre

Tamlite Field Sales Centre,  
 Park Farm Industrial Estate,  
 Redditch, Worcestershire,  
 B98 0HU

T. +44 1527 517 777  
 E. [sales@tamllite.co.uk](mailto:sales@tamllite.co.uk)  
 W. [tamllite.co.uk](http://tamllite.co.uk)

