

CAPITAL

Recessed module for Lay In type ceilings



5 YR

IP20



Features:

Recessed module for lay in ceilings

Also available for plasterboard, burgess and SAS type ceilings

I-Tech microprism optic provides excellent glare control with BS EN-12464 compliance

Suitable for office installations and general or task area lighting

Available in 3 standard sizes with bespoke, retro-fit versions available

Gear options of DALI and Emergency

Air handling for 40 litres/second option

CRI: Ra>80

Up to 120 lumens per Watt efficacy

50,000 hours lifetime

Construction:

Pressed steel body

Prismatic polycarbonate diffuser

Supplied as standard with neutral white (4000K) LED

Options:

D - Dimmable DALI

M3 - 3 hours integrated emergency

A3 - Emergency self test

D3 - DALI self test

CAPITAL

Recessed module for Lay In type ceilings

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
CPL66MP300NW	25W - 4000K Microprism diffuser	3,000	25	120	5.40
CPL123MP300NW	28W - 4000K Microprism diffuser	3,000	28	107	6.03

Dimensions

All dimensions are in millimetres

Order code	A	B	C
CPL66MP300NW	595	595	108
CPL123MP300NW	1195	595	98

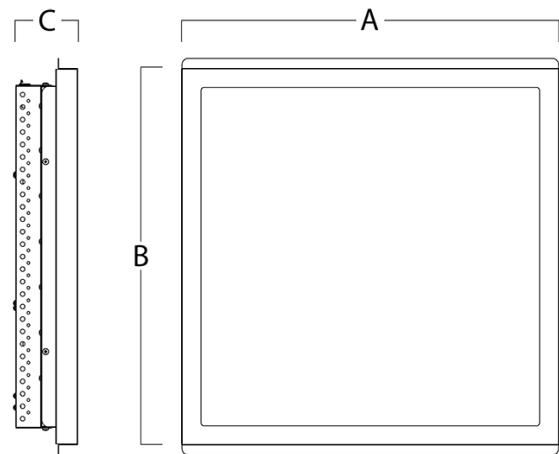

Installation instructions:

[View](#) or download the ceiling compatibility guide

To specify:

Recessed module for Lay In type ceilings as per Tamlite CAPITAL range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.