

# CAPITAL B

Recessed module for Burgess type ceilings



### Features:

- Recessed module for burgess type ceilings
- Also available for plasterboard, burgess and SAS type ceilings
- I-Tech microprism optic provides excellent glare control with BS EN-12464 compliance
- Suitable for office installations and general or task area lighting
- Available in 3 standard sizes with bespoke, retro-fit versions available
- Gear options of DALI and Emergency
- Air handling for 40 litres/second option

- CRI: Ra>80
- Up to 120 lumens per Watt efficacy
- 50,000 hours lifetime

### Construction:

- Pressed steel body
- Prismatic polycarbonate diffuser
- Supplied as standard with neutral white (4000K) LED

### Options:

- D - Dimmable DALI
- M3 - 3 hours integrated emergency
- A3 - Emergency self test
- D3 - DALI self test

# CAPITAL B

Recessed module for Burgess type ceilings

### Order Codes


All dimensions are in millimetres

| Order code    | Description                     | Lumens (lm) | Total power (W) | Efficacy (lm/W) | Weight (kg) |
|---------------|---------------------------------|-------------|-----------------|-----------------|-------------|
| CPB66MP300NW  | 25W - 4000K Microprism diffuser | 3,000       | 25              | 120             | 5.55        |
| CPB123MP300NW | 28W - 4000K Microprism diffuser | 3,000       | 28              | 107             | 6.55        |

### Dimensions

All dimensions are in millimetres

| Order code    | A    | B   | C   |
|---------------|------|-----|-----|
| CPB66MP300NW  | 599  | 599 | 109 |
| CPB123MP300NW | 1199 | 299 | 109 |

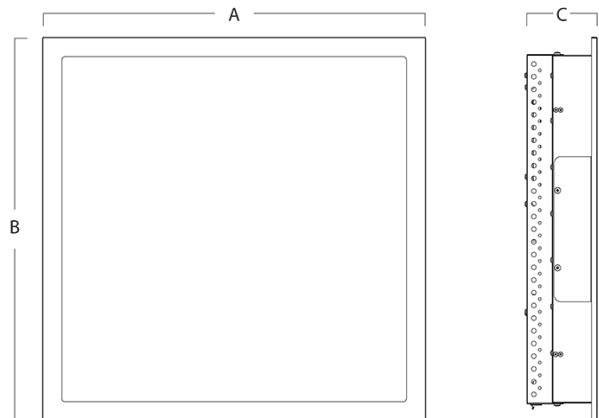

### Installation instructions:

[View](#) or download the ceiling compatibility guide

### To specify:

Recessed module for Burgess type ceilings as per Tamlite CAPITAL B range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.