

LUNAR

High performance LED bulkhead



5 YR

IP44



Features:

- Ideal for achieving design performance for corridor areas (100 lux)
- Available with 3 lumen outputs
- Gear options including dimmable, DALI and emergency available
- Available with e-CONNECT (<https://www.tamlite.co.uk/e-connect/>)
- CRI: Ra>80
- Up to 122 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Polycarbonate body and diffuser finished in white
- Opal TP(a) diffuser
- 20mm knock-out conduit entries on rear and side of body
- Supplied as standard with neutral white (4000K) LED

Options:

- HFS - Microwave movement sensor
- HFD - Digital dimmable version
- HFSD - Dimmable microwave movement sensor
- D - Dimmable DALI
- M3 - 3 hours integrated emergency
- A3 - Emergency self test
- D3 - DALI self test
- WW - Warm white (3000K)

LUNAR

High performance LED bulkhead

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
LUN110NW	10W - 4000K	1200	10	120	2.20
LUN220NW	18W - 4000K	2200	18	122	2.20
LUN300NW	28W - 4000K	3200	28	114	2.20

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
LUN110NW	105	454
LUN220NW	105	454
LUN300NW	105	454

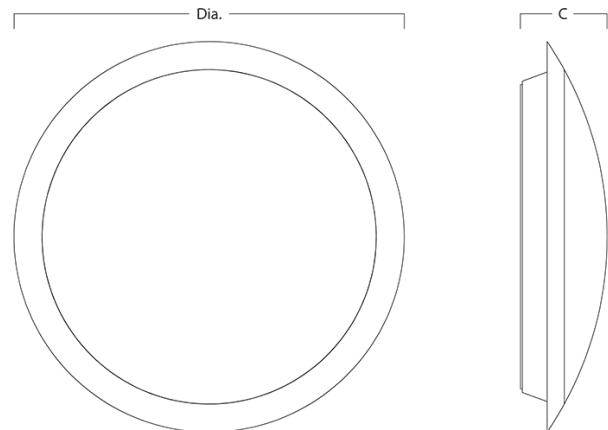

Installation instructions:

Wall or ceiling fix via rear or side (x2) knock-outs and wired via rear cable entry

To specify:

Circular IP44 white / opal LED bulkhead as per Tamlite LUNAR range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.