

# MODLED TP

Low energy LED recessed edge-lit panel with Tp(a) rating



5 YR

IP20



### Features:

High performance opal TP(a) diffuser for even light distribution

Suitable for use in hospitals, offices, schools and universities

Modular dimensions allow easy install in most exposed T-bar ceilings

Remote pre-wired driver supplied

High performance opal diffuser for even light distribution

Gear options including dimmable, DALI and emergency available

CRI: Ra>80

Up to 110 lumens per Watt efficacy

45,000 hours lifetime (L70/B50)

### Construction:

Extruded aluminium frames finished in white (RAL 9016)

Opal PMMA diffuser

Multi, side-lit LED array

Supplied as standard with neutral white (4000K) LED

### Options:

HFD - Digital dimmable version

RM3 - Remote maintained 3 hours emergency

# MODLED TP

Low energy LED recessed edge-lit panel with Tp(a) rating

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
MLT66340NW	31W - 4000K	3400	31	110	3.50

### Dimensions

All dimensions are in millimetres

Order code	A	B	C
MLT66340NW	595	595	13

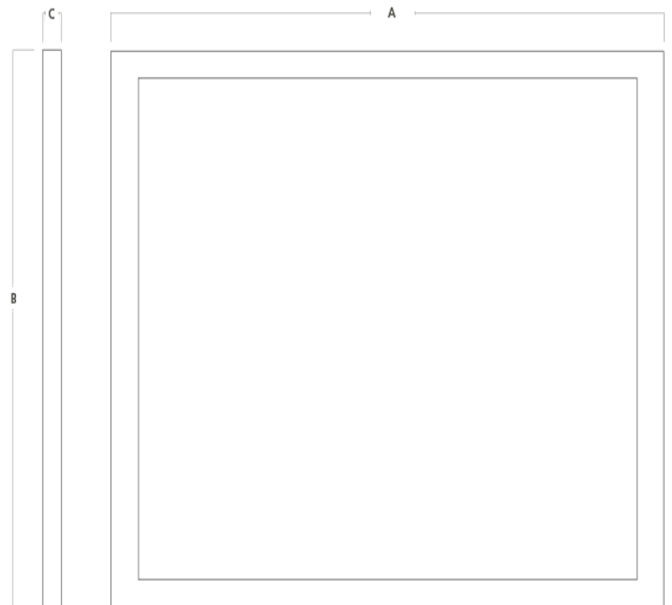

### Installation instructions:

Recessed lay-in for exposed 25mm ceiling grid. Brackets available for plasterboard mount. Frame available for metal pan ceilings

### To specify:

Recessed opal panel supplied with driver as per Tamlite MODLED TP range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.