

NIMROD

Square or circular LED bulkhead



5 YR

IP65



Features:

Suitable for interior and exterior applications

Available in white or black base with opal or prismatic diffuser

Full range of gear options including dimmable, DALI and emergency are available

CRI: Ra>80

Up to 106 lumens per Watt efficacy

50,000 hours lifetime (L70/B50)

Construction:

Polycarbonate body finished in black (RAL 9016) or white (RAL 9005)

Opal or prismatic polycarbonate diffuser

Supplied with neutral white (4000K) LED

Options:

PC - Photocell

HFS - Microwave movement sensor

HFSD - Dimmable microwave movement sensor

D - Dimmable DALI

M3 - 3 hours integrated emergency

A3 - Emergency self test

D3 - DALI self test

B - Black (RAL 9005)

W - White

O - Opal diffuser

PRIS - Prismatic diffuser

NIMROD

Square or circular LED bulkhead

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
NIM17LEDPNW	17W - 4000K Square prismatic	1800	17	106	1.10
NIM17LEDONW	17W - 4000K Square opal	1200	17	71	1.10
CNIM17LEDPNW	17W - 4000K Circular prismatic	1800	17	106	1.00
CNIM17LEDONW	17W - 4000K Circular opal	1200	17	71	1.00

Dimensions

All dimensions are in millimetres

Order code	A	B	C
NIM17LEDPNW	285	285	90
NIM17LEDONW	285	285	90
CNIM17LEDPNW			90
CNIM17LEDONW			90

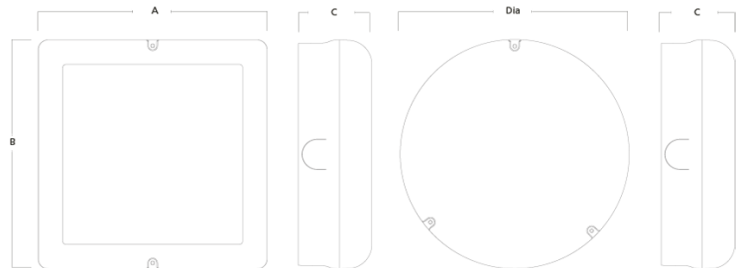

Installation instructions:

Wall or ceiling fix base mounting with rear or side cable entry and wired via rear cable entry

To specify:

LED polycarbonate IP65 bulkhead as per Tamlite NIMROD LED range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.