

# SAPPHIRE XL

High output decorative pendant for retail areas



### Features:

High output pendant with prismatic cover  
Ideal for large retail or public areas at up to 12M mounting height  
Up to 130 lumens per Watt efficacy  
50,000 hours lifetime (L70/B50)

### Construction:

Die-cast aluminium body  
Clear polycarbonate lens  
Integral driver

### Options:

No options available

# SAPPHIRE XL

High output decorative pendant for retail areas

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
SPXP1300NWW	100W - 4000K - Decorative pendant	13,000	100	130	4.48
SPXP1900NWW	150W - 4000K - Decorative pendant	19000	150	127	4.48

### Dimensions

All dimensions are in millimetres

Order code	C	Diameter
SPXP1300NWW	365	412
SPXP1900NWW	365	412

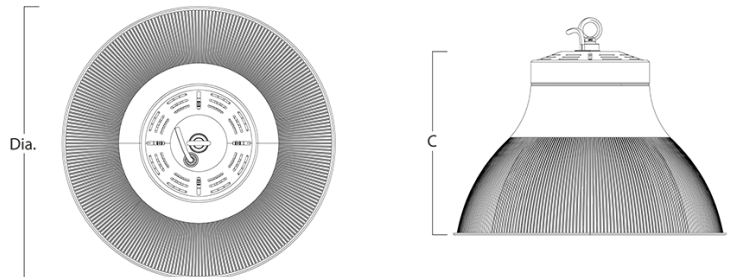

### Installation instructions:

Fixed via 20mm hook and supplied with 1.5m Flex

### To specify:

High output decorative pendant as per Tamlite SAPHIRE XL range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.