

SIGNUM

Suspended linear system



Features:

Suspended linear system for office, libraries and large open areas

Stand-alone or continuous versions

Direct or direct/indirect light output

Connection accessories to create dynamic systems

Available with opal or microprism optic

Choice of 2 module lengths and 3 colour options

Supplied in 4000K

CRI: Ra>80

Up to 138 lumens per Watt efficacy

50,000 hours lifetime (L90/B10)

Construction:

Extruded aluminium body

Available in white (RAL 9010), grey (RAL 9006) or black (RAL 9005)

PMMA microprism or Polycarbonate opal diffuser

Supplied with plastic end caps

Options:

D - Dimmable DALI

M3 - 3 hours integrated emergency

MPRM - Micro-prism diffuser

SIGNUM

Suspended linear system

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
SGD4230ONWG	19W - 4000K Opal diffuser, direct - Grey	2300	19	121	2.30
SGD4230ONWW	19W - 4000K Opal diffuser, direct - White	2300	19	121	2.30
SGD4230ONWB	19W - 4000K Opal diffuser, direct - Black	2300	19	121	2.30
SGD5340ONWW	28W - 4000K Opal diffuser, direct - White	3400	28	121	3.20
SGD5340ONWB	28W - 4000K Opal diffuser, direct - Black	3400	28	121	3.20
SGD5340ONWG	28W - 4000K Opal diffuser, direct - Grey	3400	28	121	3.20
SGN4530ONWG	41W - 4000K Opal diffuser, indirect/direct - Grey	5300	41	129	3.70
SGN4530ONWW	41W - 4000K Opal diffuser, indirect/direct - White	5300	41	129	3.70
SGN4530ONWB	41W - 4000K Opal diffuser, indirect/direct - Black	5300	41	129	3.70
SGN5730ONWG	56W - 4000K Opal diffuser, indirect/direct - Grey	7300	56	130	5.35
SGN5730ONWW	56W - 4000K Opal diffuser, indirect/direct - White	7300	56	130	5.35
SGN5730ONWB	56W - 4000K Opal diffuser, indirect/direct - Black	7300	56	130	5.35

Dimensions

All dimensions are in millimetres

Order code	A	B	C
SGD4230ONWG	1085	57	75
SGD4230ONWW	1085	57	75
SGD4230ONWB	1085	57	75
SGD5340ONWW	1625	57	75
SGD5340ONWB	1625	57	75
SGD5340ONWG	1625	57	75
SGN4530ONWG	1085	57	75
SGN4530ONWW	1085	57	75
SGN4530ONWB	1085	57	75
SGN5730ONWG	1625	57	75
SGN5730ONWW	1625	57	75
SGN5730ONWB	1625	57	75

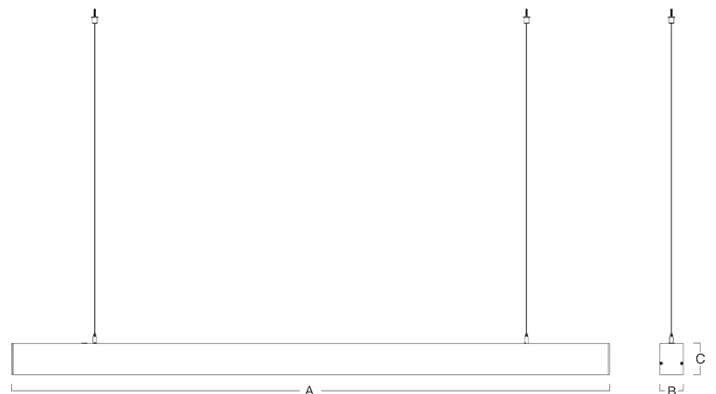

Installation instructions:

To specify:

Suspended linear system as per Tamlite SIGNUM range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.