

SOLO S

Suspended linear system



5 YR

IP20



Features:

Modern surface or recessed LED linear system with opal diffuser (option for micro-prism diffuser)
Suitable for open areas, schools and offices
Surface version can be suspended with wire suspension kit
Can be used as stand-alone or continuous system
Available in 3 colour options
Gear options including dimmable, DALI and emergency available
CRI: Ra>80
Up to 92 lumens per Watt efficacy
50,000 hours lifetime (L70/B50)

Construction:

Extruded aluminium body finished in white (RAL 9016), grey (RAL 9006) or black (RAL 9005)
High performance opal diffuser
Die-cast aluminium end caps
Supplied as standard with neutral white (4000K) LED

Options:

D - Dimmable DALI
M3 - 3 hours integrated emergency
A3 - Emergency self test
D3 - DALI self test
WW - Warm white (3000K)
CW - Cool white (5000K)
B - Black (RAL 9005)
G - Grey (RAL 9006)
MPRM - Micro-prism diffuser

SOLO S

Suspended linear system

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
SLS4280NW	31W - 4000K	2800	31	90	4.10
SLS5350NW	38W - 4000K	3500	38	92	4.80

Dimensions

All dimensions are in millimetres

Order code	A	B	C
SLS4280NW	1165	65	65
SLS5350NW	1455	65	65

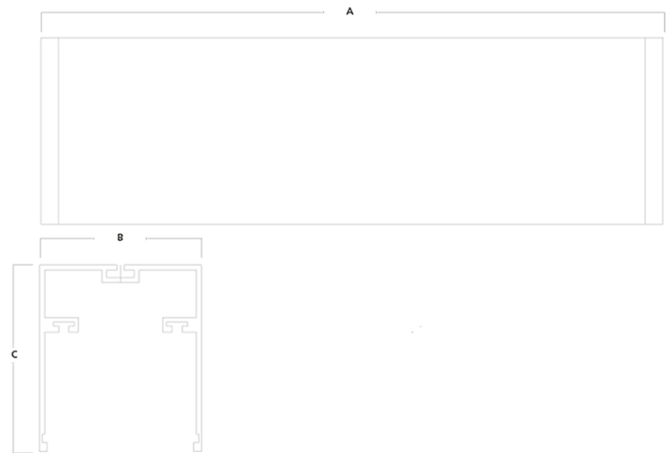

Installation instructions:

Surface mount or suspended via wire suspension kit (supplied separately)

To specify:

Suspended or ceiling mounted, linear modules with diffuser as per Tamlite SOLO range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.