

SONATA

LED Track spot



Features:

LED track spot for retail and decorative applications

Choice of 3 beam angles

2 outputs, 2000 & 2800 lumens

Available with DALI gear for use on TRIO DALI 3 circuit track

Available in white (RAL 9016) or Black (9005)

CRI: Ra>80

50,000 hours lifetime (L70/B50)

Construction:

Die-cast aluminium body finished in choice of white (RAL 9016) or Black (9005)

Supplied with 3 circuit track adapter

Options:

D - Dimmable DALI

WW - Warm white (3000K)

SONATA

LED Track spot

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
SNT200MNWB	SONATA Track spot Black 17W - 4000K - Medium beam	2000	17	118	0.69
SNT200WNWW	SONATA Track spot White 17W - 4000K - Wide beam	2000	17	118	0.69
SNT200WNWB	SONATA Track spot Black 17W - 4000K - Wide beam	2000	17	118	0.69
SNT200MNWWW	SONATA Track spot White 17W - 4000K - Medium beam	2000	17	118	0.69
SNT200NNWB	SONATA Track spot Black 17W - 4000K - Narrow beam	2000	17	118	0.69
SNT200NNWWW	SONATA Track spot White 17W - 4000K - Narrow beam	2000	17	118	0.69
SNT280MNWWW	SONATA Track spot White 25W - 4000K - Medium beam	2800	25	112	0.69
SNT280MNWB	SONATA Track spot Black 25W - 4000K - Medium beam	2800	25	112	0.69
SNT280WNWWW	SONATA Track spot White 25W - 4000K - Wide beam	2800	25	112	0.69
SNT280WNWB	SONATA Track spot Black 25W - 4000K - Wide beam	2800	25	112	0.69
SNT280NNWB	SONATA Track spot Black 25W - 4000K - Narrow beam	2800	25	112	0.69
SNT280NNWWW	SONATA Track spot White 25W - 4000K - Narrow beam	2800	25	112	0.69

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
SNT200MNWB	42.4	85
SNT200WNWWW	42.4	85
SNT200WNWB	42.4	85
SNT200MNWWW	42.4	85
SNT200NNWB	42.4	85
SNT200NNWWW	42.4	85
SNT280MNWWW	269	85
SNT280MNWB	42.4	85
SNT280WNWWW	42.4	85
SNT280WNWB	42.4	85
SNT280NNWB	42.4	85
SNT280NNWWW	42.4	85

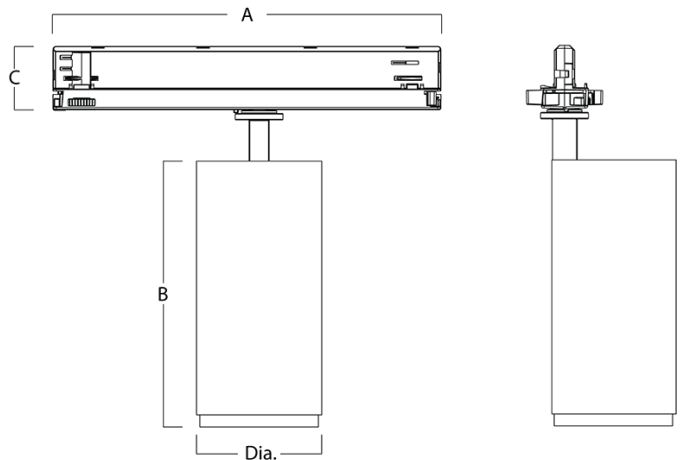

Installation instructions:

Track mounted via 3 circuit track adapter

To specify:

LED Track spot as per Tamlite Sonata range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.